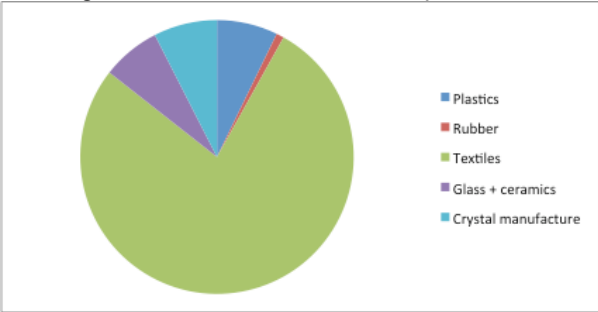
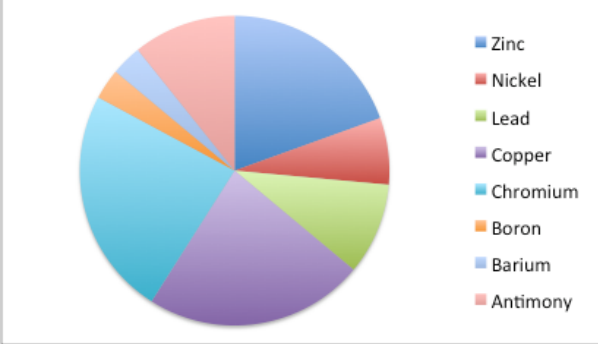
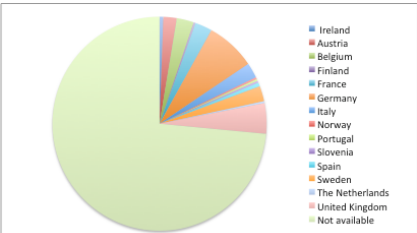
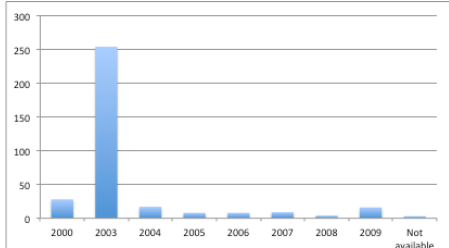


Section	Content
Title of spERC	Industrial use of metal compounds
spERC code	Eurometaux 2.5-6a.v2.1 - Industrial use of metal compounds in plastics and rubber industry sector Eurometaux 2.5-6b.v2.1 - Industrial use of metal compounds in textile industry sector Eurometaux 2.5-6c.v2.1 - Industrial use of metal compounds in glass, ceramics and crystal industry sector
Scope	<p>Limitations of coverage compared to ERC relate to:</p> <p><b>User groups:</b> User groups include: industrial use of metal compounds. The coverage of the main industries are plastics, textile and glass.</p>  <p><b>Substance groups or functions:</b> Release defaults are derived from measured emissions. Metal representativeness of background data:</p>  <p>Metal (compound) is defined here in a broad sense. The definition includes alkali metals, alkaline earth metals, transition metals, post-transition metals, metalloids and their compounds but excludes non-metals, halogens, noble gases and metallo-organic compounds. SPERC valid for metals with solid water partition coefficient for suspended matter between 4,500 L/kg and 300,000 L/kg.</p> <p><b>Types of products:</b> Metal compounds</p> <p><b>Geographical and Time:</b> Release defaults are derived from measured emissions from various EU member states and between 2003-2009.</p>  

Related use descriptors	PROC1, PROC2, PROC3, PROC4, PROC5, PROC6, PROC8a, PROC8b, PROC9, PROC14, PROC26 SU 14, ERC4, ERC5, ERC6A, ERC6B
Operational conditions	<p>Since metal SPERCs are based on measured data at end-of-pipe on-site, all processes are integrated in the release fractions from raw materials handling to cleaning and maintenance.</p> <p><b>Size of installations:</b> Amount used can vary between 10 and 10,000 Tonnes/year.</p> <p><b>Processing conditions:</b> Open and closed systems, wet and dry processes</p>
Obligatory onsite RMMs	<p><b>Air</b> Direct air emissions should be reduced by implementing one or more of the following RMMs:</p> <ul style="list-style-type: none"> <li>• Electrostatic precipitators using wide electrode spacing: 5 – 15 mg/Nm<sup>3</sup></li> <li>• Wet electrostatic precipitators: &lt; 5 mg/Nm<sup>3</sup></li> <li>• Cyclones, but as primary collector: &lt; 50 mg/Nm<sup>3</sup></li> <li>• Fabric or bag filters: high efficiency in controlling fine particulate (melting): achieve emission values &lt; 5mg/Nm<sup>3</sup>. Membrane filtration techniques can achieve &lt; 1 mg/Nm<sup>3</sup></li> <li>• Ceramic and metal mesh filters. PM10 particles are removed: 0.1 mg/Nm<sup>3</sup></li> <li>• Wet scrubbers: &lt; 4 mg/Nm</li> </ul> <p>One or more of these RMMs (of which fabric or bag filters and wet scrubbers are more common) were reported to be present in more than 50% of the sites.</p> <p>Fugitive emissions should be reduced from material storage and handling, reactors or furnaces and from material transfer points by following hierarchical measures: process optimization and minimization of emissions, sealed reactors and furnaces, targeted fume collection.</p> <p><b>Water</b> Following IPPC-BAT document, the treatment methods are very much dependent on the specific processes and the metals involved. Direct water emissions should be reduced by implementing one or more of the following RMMs:</p> <ul style="list-style-type: none"> <li>• Chemical precipitation: used primarily to remove the metal ions (e.g. Ca(OH)<sub>2</sub>, pH 11 precipitation: &gt;99% removal efficiency; Fe(OH)<sub>3</sub>, pH 11: 96% removal efficiency)</li> <li>• Sedimentation (e.g. Na<sub>2</sub>S, pH 11, &gt;99% removal efficiency)</li> <li>• Filtration: used as final clarification step (e.g. ultrafiltration, pH 5.1: 93% removal efficiency, nanofiltration: 97% removal efficiency, reverse osmosis, pH 4-11: 99% removal efficiency)</li> <li>• Electrolysis: for low metal concentration (e.g. electrodialysis: 13% removal efficiency within 2 hours at 2g/L, membrane electrolysis, electrochemical precipitation, pH 4-10, &gt;99% removal efficiency)</li> <li>• Reverse osmosis: extensively used for the removal of dissolved metals</li> <li>• Ion exchange: final cleaning step in the removal of heavy metal from process wastewater (e.g. 90% removal efficiency for clinoptinolite and</li> </ul>

	<p>100% removal efficiency for synthetic zeolite)</p> <ul style="list-style-type: none"> <li>Biological treatment plant</li> </ul> <table border="1"> <tr> <td>Eurometaux 2.5-6a.v2.1 (plastics and rubber)</td> <td>99.9% (93.6 – 99.98%)</td> <td>Based on data from 5 sites.</td> </tr> <tr> <td>Eurometaux 2.5-6b.v2.1 (textile)</td> <td>* (77% -92%)</td> <td>Based on removal efficiencies in municipal treatment plants</td> </tr> <tr> <td>Eurometaux 2.5-6c.v2.1 (glass)</td> <td>98% (87%-99.9%)</td> <td>Based on data from 17 sites.</td> </tr> </table> <p>* More information can be found in EC (2003), Integrated Pollution Prevention and Control (IPCC): reference document on Best Available Techniques in the Textiles Industries.</p> <p><b>Waste</b> Releases to the floor, water and soil are to be prevented. If the metal content of the waste is elevated enough, internal or external recovery/recycling might be considered.</p>	Eurometaux 2.5-6a.v2.1 (plastics and rubber)	99.9% (93.6 – 99.98%)	Based on data from 5 sites.	Eurometaux 2.5-6b.v2.1 (textile)	* (77% -92%)	Based on removal efficiencies in municipal treatment plants	Eurometaux 2.5-6c.v2.1 (glass)	98% (87%-99.9%)	Based on data from 17 sites.			
Eurometaux 2.5-6a.v2.1 (plastics and rubber)	99.9% (93.6 – 99.98%)	Based on data from 5 sites.											
Eurometaux 2.5-6b.v2.1 (textile)	* (77% -92%)	Based on removal efficiencies in municipal treatment plants											
Eurometaux 2.5-6c.v2.1 (glass)	98% (87%-99.9%)	Based on data from 17 sites.											
Substance use rate	Assessment defaults as set by ERC. It is recommended to use a realistic substance use rate.												
Days emitting	<p>Default number of emission days are derived from a multi-metal background database of measured site-specific release factors collected under the former Directive of New and Existing Substances and REACH 2010 registration dossiers.</p> <table border="1"> <tr> <td>Eurometaux 2.5-6a.v2.1 (plastics and rubber)</td> <td>216 days/year</td> <td>The 10th percentile of reported site-specific number of emission days for 31 sites.</td> </tr> <tr> <td>Eurometaux 2.5-6b.v2.1 (textile)</td> <td>77 days/year</td> <td>The 10th percentile of reported site-specific number of emission days for 10 sites.</td> </tr> <tr> <td>Eurometaux 2.5-6c.v2.1 (glass)</td> <td>180 days/year</td> <td>The 10th percentile of reported site-specific number of emission days for 39 sites.</td> </tr> </table>	Eurometaux 2.5-6a.v2.1 (plastics and rubber)	216 days/year	The 10th percentile of reported site-specific number of emission days for 31 sites.	Eurometaux 2.5-6b.v2.1 (textile)	77 days/year	The 10th percentile of reported site-specific number of emission days for 10 sites.	Eurometaux 2.5-6c.v2.1 (glass)	180 days/year	The 10th percentile of reported site-specific number of emission days for 39 sites.			
Eurometaux 2.5-6a.v2.1 (plastics and rubber)	216 days/year	The 10th percentile of reported site-specific number of emission days for 31 sites.											
Eurometaux 2.5-6b.v2.1 (textile)	77 days/year	The 10th percentile of reported site-specific number of emission days for 10 sites.											
Eurometaux 2.5-6c.v2.1 (glass)	180 days/year	The 10th percentile of reported site-specific number of emission days for 39 sites.											
Integrated release factors (air, water, soil)	<p>Default release factors are derived from a multi-metal background database of measured site-specific release factors collected from peer-reviewed EU Risk Assessment Reports under the former Directive of New and Existing Substances and REACH 2010 registration dossiers.</p> <p><b>Air</b></p> <table border="1"> <tr> <td>Eurometaux 2.5-6a.v2.1 (plastics and rubber)</td> <td>0.001% (after on-site RMM)</td> <td>The 90<sup>th</sup> percentile of reported site-specific release factors to air for 28 sites.</td> </tr> <tr> <td>Eurometaux 2.5-6b.v2.1 (textile)</td> <td>0.001% (after on-site RMM)</td> <td>The 90<sup>th</sup> percentile of reported site-specific release factors to water for 8 sites.</td> </tr> <tr> <td>Eurometaux 2.5-6c.v2.1 (glass)</td> <td>2% (after on-site RMM)</td> <td>The 90<sup>th</sup> percentile of reported site-specific release factors to water for 40 sites.</td> </tr> </table> <p><b>Water</b></p> <table border="1"> <tr> <td>Eurometaux 2.5-6a.v2.1 (plastics and rubber)</td> <td>0.001% (after on-</td> <td>The 90th percentile of reported site-specific release factors to</td> </tr> </table>	Eurometaux 2.5-6a.v2.1 (plastics and rubber)	0.001% (after on-site RMM)	The 90 <sup>th</sup> percentile of reported site-specific release factors to air for 28 sites.	Eurometaux 2.5-6b.v2.1 (textile)	0.001% (after on-site RMM)	The 90 <sup>th</sup> percentile of reported site-specific release factors to water for 8 sites.	Eurometaux 2.5-6c.v2.1 (glass)	2% (after on-site RMM)	The 90 <sup>th</sup> percentile of reported site-specific release factors to water for 40 sites.	Eurometaux 2.5-6a.v2.1 (plastics and rubber)	0.001% (after on-	The 90th percentile of reported site-specific release factors to
Eurometaux 2.5-6a.v2.1 (plastics and rubber)	0.001% (after on-site RMM)	The 90 <sup>th</sup> percentile of reported site-specific release factors to air for 28 sites.											
Eurometaux 2.5-6b.v2.1 (textile)	0.001% (after on-site RMM)	The 90 <sup>th</sup> percentile of reported site-specific release factors to water for 8 sites.											
Eurometaux 2.5-6c.v2.1 (glass)	2% (after on-site RMM)	The 90 <sup>th</sup> percentile of reported site-specific release factors to water for 40 sites.											
Eurometaux 2.5-6a.v2.1 (plastics and rubber)	0.001% (after on-	The 90th percentile of reported site-specific release factors to											

		site STP)	wastewater for 26 sites.		
	Eurometaux 2.5-6b.v2.1 (textile)	0.007% (after on-site STP)	The 90th percentile of reported site-specific release factors to wastewater for 172 sites.		
	Eurometaux 2.5-6c.v2.1 (glass)	0.5% (after on-site STP)	The 90th percentile of reported site-specific release factors to wastewater for 39 sites.		
	<p><b>Soil</b> Not applicable to local scale</p> <p><b>Waste</b></p> <table border="1"> <tr> <td>1%</td> <td>The 90<sup>th</sup> percentile of reported site-specific release factors to solid waste for 32 downstream user sites covering zinc, nickel, lead, antimony</td> </tr> </table>			1%	The 90 <sup>th</sup> percentile of reported site-specific release factors to solid waste for 32 downstream user sites covering zinc, nickel, lead, antimony
1%	The 90 <sup>th</sup> percentile of reported site-specific release factors to solid waste for 32 downstream user sites covering zinc, nickel, lead, antimony				
Optional risk management measures for iteration	For iteration purposes (if SPERC default release factors do not demonstrate safe use), it is recommended to measure/monitor the air and/or water releases as a first refinement step. In case further iterations are required, a combination of multiple obligatory on-site measures can be considered.				
Narrative description	<p>Since metal SPERCs are based on measured data at end-of-pipe on-site, all indicated PROCs are integrated in the release fractions from raw materials handling to cleaning and maintenance.</p> <p>Hazardous wastes from onsite risk management measures and solid or liquid wastes from production, use and cleaning processes should be disposed of separately to hazardous waste incineration plants or hazardous waste landfills as hazardous waste.</p>				
Scaling	If a site does not comply with the conditions stipulated in the SPERC, it is recommended to monitor the air and water releases and apply the Metals DU scaling tool in order to perform a site-specific assessment. Each site can evaluate whether he works inside the boundaries set by the ES through scaling. The Metal EUSES calculator for DUs is freely available to metal industry DUs and can be downloaded from <a href="http://www.arche-consulting.be/Metal-CSA-toolbox/du-scaling-tool">http://www.arche-consulting.be/Metal-CSA-toolbox/du-scaling-tool</a> .				

Determinant Label <sup>1</sup>	Quali-/Quantitative <sup>2</sup>	Value <sup>3</sup>	Description of Value <sup>4</sup>
On site treatment of wastewater	Qual	Chemical precipitation or sedimentation or filtration or electrolysis or reverse osmosis or ion exchange or biological treatment	<p>Following IPPC-BREF note document, the treatment methods are very much dependent on the specific processes and the metals involved. Direct water emissions should be reduced by implementing one or more of the following RMMs:</p> <ul style="list-style-type: none"> <li>• Chemical precipitation: used primarily to remove the metal ions (e.g. Ca(OH)<sub>2</sub>, pH 11 precipitation: &gt;99% removal efficiency; Fe(OH)<sub>3</sub>, pH 11: 96% removal efficiency)</li> <li>• Sedimentation (e.g. Na<sub>2</sub>S, pH 11, &gt;99% removal efficiency)</li> <li>• Filtration: used as final clarification step (e.g. ultrafiltration, pH 5.1: 93% removal efficiency,</li> </ul>

			<p>nanofiltration: 97% removal efficiency, reverse osmosis, pH 4-11: 99% removal efficiency)</p> <p>"• Electrolysis: for low metal concentration (e.g. electrodialysis: 13% removal efficiency within 2 hours at 2g/L, membrane electrolysis, electrochemical precipitation, pH 4-10, &gt;99% removal efficiency)</p> <p>• Reverse osmosis: extensively used for the removal of dissolved metals</p> <p>Ion exchange: final cleaning step in the removal of heavy metal from process wastewater (e.g. 90% removal efficiency for clinoptinolite and 100% removal efficiency for synthetic zeolite)</p> <p>More information can be found in EC (2001), Integrated Pollution Prevention and Control (IPCC): reference document on Best Available Techniques in the Non Ferrous Metals Industries.</p>
On site treatment of off-air	Qual	Electrostatic precipitator or wet electrostatic precipitator or cyclones or fabric/bag filter or ceramic/metal mesh filter or wet scrubber	<p>Direct air emissions should be reduced by implementing one or more of the following RMMs:</p> <ul style="list-style-type: none"> <li>· Electrostatic precipitators using wide electrode spacing: 5 – 15 mg/Nm<sup>3</sup></li> <li>· Wet electrostatic precipitators: &lt; 5 mg/Nm<sup>3</sup></li> <li>· Cyclones, but as primary collector: &lt; 50 mg/Nm<sup>3</sup></li> <li>· Fabric or bag filters: high efficiency in controlling fine particulate (melting): achieve emission values &lt; 5mg/Nm<sup>3</sup>. Membrane filtration techniques can achieve &lt; 1 mg/Nm<sup>3</sup></li> <li>· Ceramic and metal mesh filters. PM10 particles are removed: 0.1 mg/Nm<sup>3</sup></li> </ul> <p>Wet scrubbers: &lt; 4 mg/Nm</p> <p>Fugitive emissions should be reduced from material storage and handling, reactors or furnaces and from material transfer points by following hierarchical measures: process optimization and minimization of emissions, sealed reactors and furnaces, targeted fume collection.</p>